
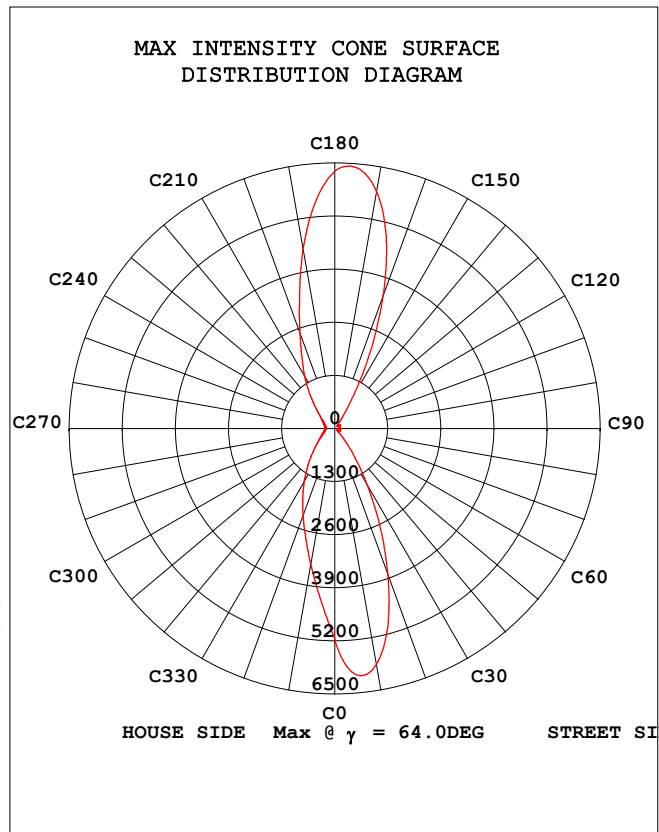


STREETLIGHT PHOTOMETRIC TEST REPORT

| | | |
|---|----------------|-------------------|
| Test:U:220.7V I:0.2720A P:59.60W PF:0.9900 Lamp Flux:8441.99x1 lm | | |
| NAME: 路灯 | TYPE:室外 | WEIGHT:3 |
| SPEC.:LD6A-2 60W | DIM.: | SERIAL No.: |
| MFR.: | SUR.:0.07*0.25 | PROTECTION ANGLE: |

| DATA OF LAMP | | PHOTOMETRIC DATA Eff: 141.64 lm/W | | | |
|------------------|------------|-----------------------------------|----------|------------------|---------|
| MODEL | 3030 5000K | I _{max} (cd) | 6301 | η street_up(%) | 0.2 |
| NOMINAL POWER(W) | 60 | LOR(%) | 100.0 | η street_down(%) | 59.7 |
| RATED VOLTAGE(V) | 220 | TOTAL FLUX(lm) | 8442 | η house_up(%) | 0.2 |
| NOMINAL FLUX(lm) | 8441.99 | MAXIMUM @ (C,γ) | 180,64.0 | η house_down(%) | 39.9 |
| LAMPS INSIDE | 1 | η up(%) | 0.4 | 76 FLASHAREA(m2) | 0.00100 |
| TEST VOLTAGE(V) | 220.8 | η down(%) | 99.6 | SLI | 17.373 |

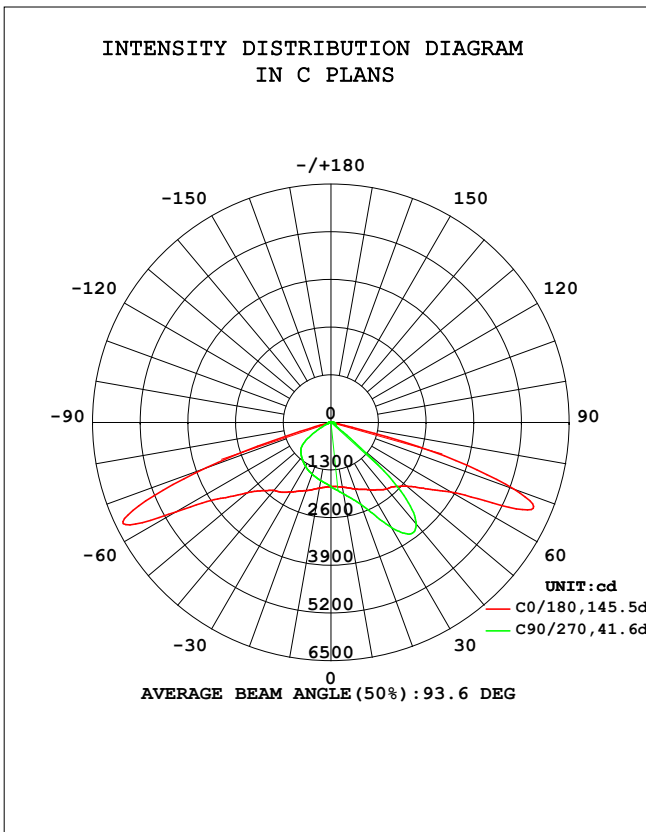


C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2018-07-19

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.279
 Humidity:65.0%
 Test Distance:9.300m [K=1.0000]
 Remarks: 28合1 电源: 明伟HLG-60H-48B

Note: SLI:Specific Luminaire Index

STREETLIGHT ISOCANDELA DIAGRAM


| | | |
|---|----------------|-------------------|
| Test:U:220.7V I:0.2720A P:59.60W PF:0.9900 Lamp Flux:8441.99x1 lm | | |
| NAME: 路灯 | TYPE:室外 | WEIGHT:3 |
| SPEC.:LD6A-2 60W | DIM.: | SERIAL No.: |
| MFR.: | SUR.:0.07*0.25 | PROTECTION ANGLE: |

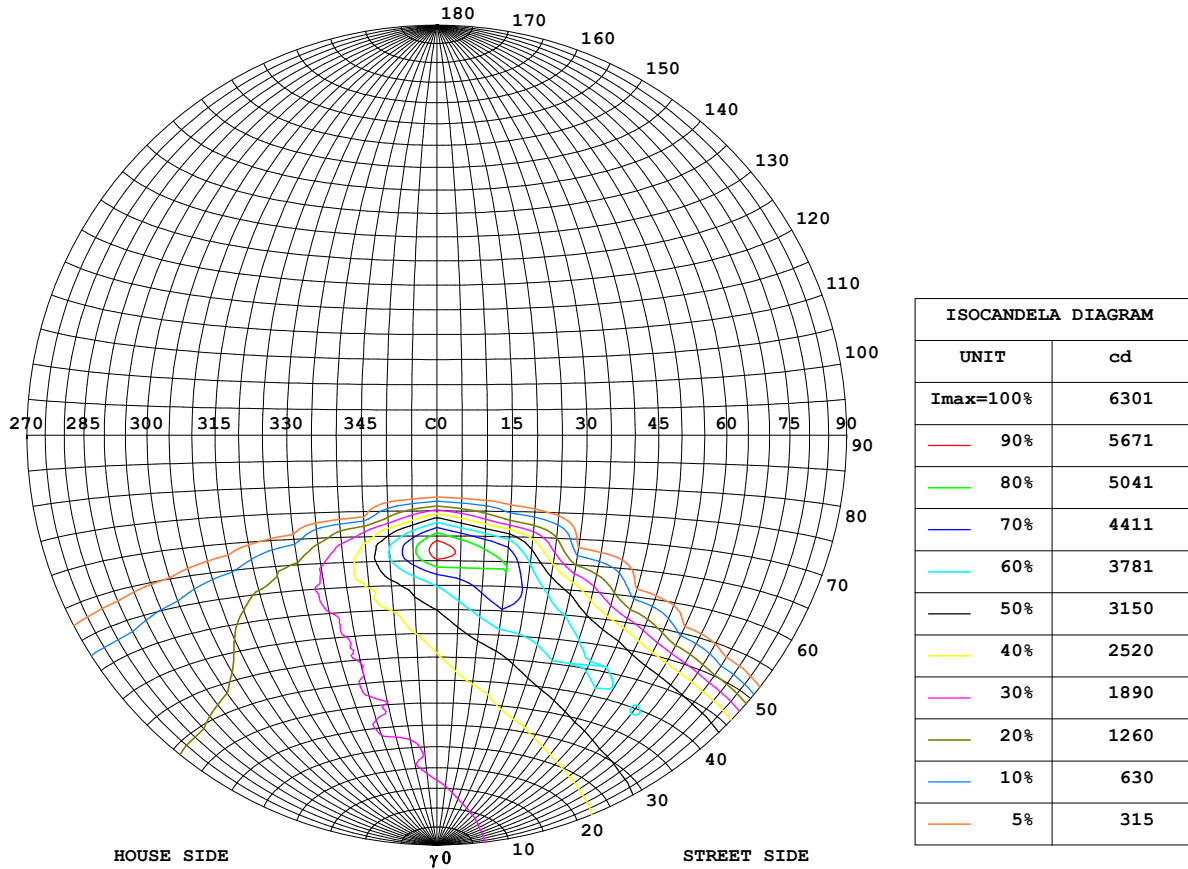

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2018-07-19

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.279
 Humidity:65.0%
 Test Distance:9.300m [K=1.0000]
 Remarks: 28合1 电源: 明伟HLG-60H-48B

COEFFICIENT OF UTILIZATION CURVE
AND ISOLUX DIAGRAM

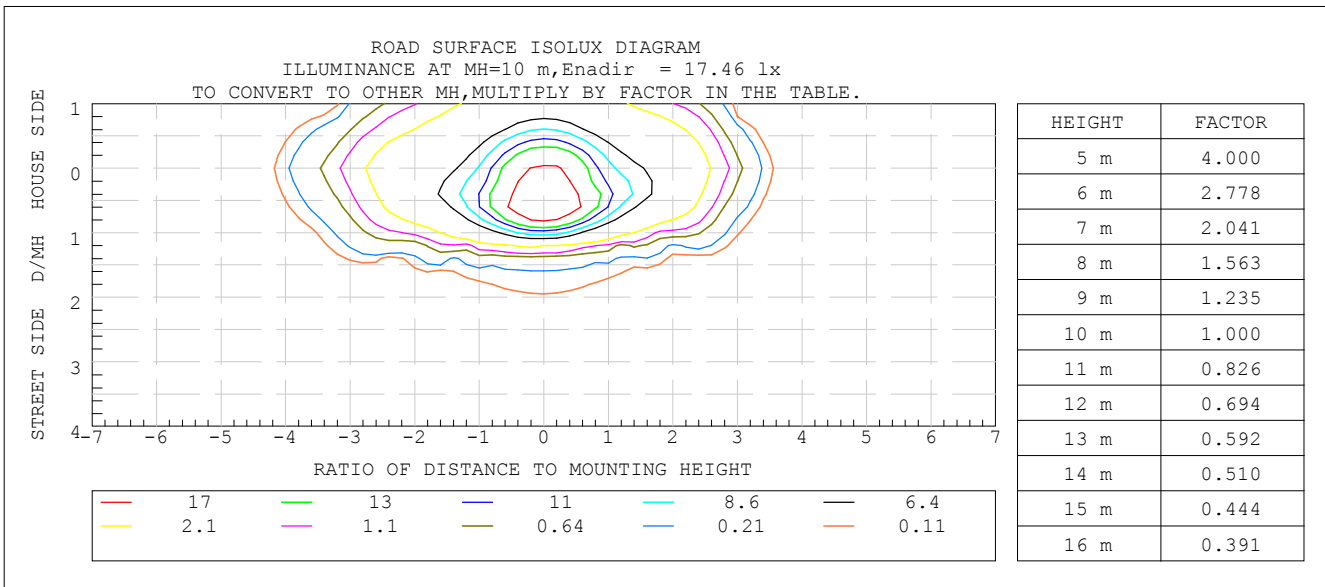

C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2018-07-19

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.279
Humidity: 65.0%
Test Distance: 9.300m [K=1.0000]
Remarks: 28合1 电源: 明伟HLG-60H-48B

ZONAL FLUX DIAGRAM

| | | |
|---|----------------|-------------------|
| Test:U:220.7V I:0.2720A P:59.60W PF:0.9900 Lamp Flux:8441.99x1 lm | | |
| NAME: 路灯 | TYPE:室外 | WEIGHT:3 |
| SPEC.:LD6A-2 60W | DIM.: | SERIAL No.: |
| MFR.: | SUR.:0.07*0.25 | PROTECTION ANGLE: |


| γ | C0 | C45 | C90 | C135 | C180 | C225 | C270 | C315 | γ | Φ zone | Φ total | %lum,lamp |
|-----|-----------------------|--------|-------|-------|-------|-------|-------|--------|---------|--------|---------|-----------|
| 5 | 1759 | 1825 | 1854 | 1832 | 1776 | 1707 | 1672 | 1698 | 0- 5 | 42.06 | 42.06 | 0.50,0.50 |
| 10 | 1792 | 1922 | 1979 | 1935 | 1820 | 1689 | 1614 | 1670 | 5- 10 | 127.6 | 169.6 | 2.01,2.01 |
| 15 | 1849 | 2049 | 2142 | 2067 | 1896 | 1688 | 1559 | 1660 | 10- 15 | 217.6 | 387.2 | 4.59,4.59 |
| 20 | 1934 | 2206 | 2374 | 2230 | 1980 | 1672 | 1505 | 1645 | 15- 20 | 313.8 | 701.1 | 8.3,8.3 |
| 25 | 2018 | 2418 | 2769 | 2456 | 2069 | 1650 | 1451 | 1625 | 20- 25 | 418.5 | 1120 | 13.3,13.3 |
| 30 | 2124 | 2755 | 3309 | 2839 | 2194 | 1606 | 1389 | 1587 | 25- 30 | 541.0 | 1661 | 19.7,19.7 |
| 35 | 2246 | 3218 | 3719 | 3339 | 2326 | 1542 | 1319 | 1530 | 30- 35 | 680.7 | 2341 | 27.7,27.7 |
| 40 | 2368 | 3676 | 3618 | 3768 | 2425 | 1463 | 1244 | 1451 | 35- 40 | 817.1 | 3158 | 37.4,37.4 |
| 45 | 2476 | 3808 | 2816 | 3770 | 2635 | 1385 | 1166 | 1373 | 40- 45 | 915.9 | 4074 | 48.3,48.3 |
| 50 | 2713 | 3358 | 865.0 | 3148 | 2987 | 1333 | 1055 | 1324 | 45- 50 | 933.3 | 5008 | 59.3,59.3 |
| 55 | 3152 | 2152 | 168.8 | 1639 | 3591 | 1317 | 802.1 | 1314 | 50- 55 | 854.3 | 5862 | 69.4,69.4 |
| 60 | 3807 | 520.5 | 124.6 | 282.3 | 4869 | 1066 | 450.1 | 1123 | 55- 60 | 800.3 | 6662 | 78.9,78.9 |
| 65 | 5576 | 149.3 | 110.8 | 130.3 | 6212 | 478.4 | 204.4 | 591.4 | 60- 65 | 765.6 | 7428 | 88,88 |
| 70 | 5296 | 103.4 | 89.93 | 95.63 | 3616 | 130.3 | 118.2 | 175.5 | 65- 70 | 613.2 | 8041 | 95.2,95.2 |
| 75 | 2044 | 81.97 | 81.12 | 76.18 | 299.0 | 79.01 | 96.14 | 86.05 | 70- 75 | 252.7 | 8294 | 98.2,98.2 |
| 80 | 86.09 | 60.63 | 72.40 | 58.82 | 51.31 | 57.82 | 77.20 | 54.72 | 75- 80 | 58.62 | 8352 | 98.9,98.9 |
| 85 | 36.84 | 57.60 | 77.19 | 59.22 | 18.33 | 44.85 | 70.16 | 37.14 | 80- 85 | 31.97 | 8384 | 99.3,99.3 |
| 90 | 11.15 | 47.22 | 20.41 | 38.82 | 5.234 | 23.54 | 48.84 | 37.79 | 85- 90 | 23.75 | 8408 | 99.6,99.6 |
| 95 | 4.532 | 6.932 | 5.325 | 1.843 | 3.971 | 1.039 | 1.589 | 1.739 | 90- 95 | 8.104 | 8416 | 99.7,99.7 |
| 100 | 3.342 | 0.8849 | 1.131 | 1.311 | 4.286 | 1.335 | 1.771 | 0.9567 | 95-100 | 1.193 | 8417 | 99.7,99.7 |
| 105 | 4.359 | 1.258 | 1.285 | 1.682 | 5.459 | 2.082 | 1.904 | 1.626 | 100-105 | 1.200 | 8419 | 99.7,99.7 |
| 110 | 5.436 | 1.769 | 1.533 | 2.119 | 6.145 | 2.905 | 2.312 | 2.554 | 105-110 | 1.490 | 8420 | 99.7,99.7 |
| 115 | 5.777 | 2.336 | 1.859 | 2.656 | 6.314 | 3.764 | 3.048 | 3.624 | 110-115 | 1.745 | 8422 | 99.8,99.8 |
| 120 | 5.909 | 2.891 | 2.345 | 3.115 | 6.446 | 4.533 | 4.013 | 4.608 | 115-120 | 1.977 | 8424 | 99.8,99.8 |
| 125 | 6.117 | 3.270 | 2.857 | 3.375 | 6.589 | 5.291 | 5.061 | 5.514 | 120-125 | 2.159 | 8426 | 99.8,99.8 |
| 130 | 6.254 | 3.671 | 3.266 | 3.828 | 6.671 | 5.846 | 5.899 | 6.427 | 125-130 | 2.243 | 8428 | 99.8,99.8 |
| 135 | 6.589 | 3.979 | 3.586 | 4.050 | 6.710 | 6.674 | 6.844 | 7.494 | 130-135 | 2.251 | 8430 | 99.9,99.9 |
| 140 | 6.863 | 4.220 | 4.149 | 4.277 | 6.423 | 7.198 | 7.649 | 8.602 | 135-140 | 2.283 | 8433 | 99.9,99.9 |
| 145 | 6.535 | 4.418 | 4.530 | 4.503 | 5.974 | 8.776 | 8.296 | 8.728 | 140-145 | 2.153 | 8435 | 99.9,99.9 |
| 150 | 6.052 | 4.550 | 4.707 | 4.553 | 5.618 | 9.239 | 8.597 | 10.47 | 145-150 | 1.969 | 8437 | 99.9,99.9 |
| 155 | 5.739 | 4.648 | 4.888 | 4.586 | 5.371 | 8.348 | 9.445 | 8.649 | 150-155 | 1.655 | 8438 | 100,100 |
| 160 | 5.541 | 4.737 | 4.977 | 4.697 | 5.311 | 7.346 | 8.755 | 7.441 | 155-160 | 1.324 | 8440 | 100,100 |
| 165 | 5.459 | 4.890 | 5.071 | 4.874 | 5.316 | 6.588 | 7.922 | 6.672 | 160-165 | 0.9915 | 8441 | 100,100 |
| 170 | 5.442 | 5.006 | 5.126 | 5.068 | 5.371 | 6.012 | 6.835 | 6.141 | 165-170 | 0.6828 | 8441 | 100,100 |
| 175 | 5.442 | 5.110 | 5.286 | 5.228 | 5.420 | 5.616 | 6.008 | 5.754 | 170-175 | 0.3978 | 8442 | 100,100 |
| 180 | 5.459 | 5.368 | 5.584 | 5.543 | 5.459 | 5.445 | 5.761 | 5.610 | 175-180 | 0.1314 | 8442 | 100,100 |
| DEG | LUMINOUS INTENSITY:cd | | | | | | | | UNIT:lm | | | |

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2018-07-19

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.279
 Humidity:65.0%
 Test Distance:9.300m [K=1.0000]
 Remarks: 28合1 电源: 明伟HLG-60H-48B

ISOCANDELA DIAGRAM


| | | |
|---|----------------|-------------------|
| Test:U:220.7V I:0.2720A P:59.60W PF:0.9900 Lamp Flux:8441.99x1 lm | | |
| NAME: 路灯 | TYPE:室外 | WEIGHT:3 |
| SPEC.:LD6A-2 60W | DIM.: | SERIAL No.: |
| MFR.: | SUR.:0.07*0.25 | PROTECTION ANGLE: |

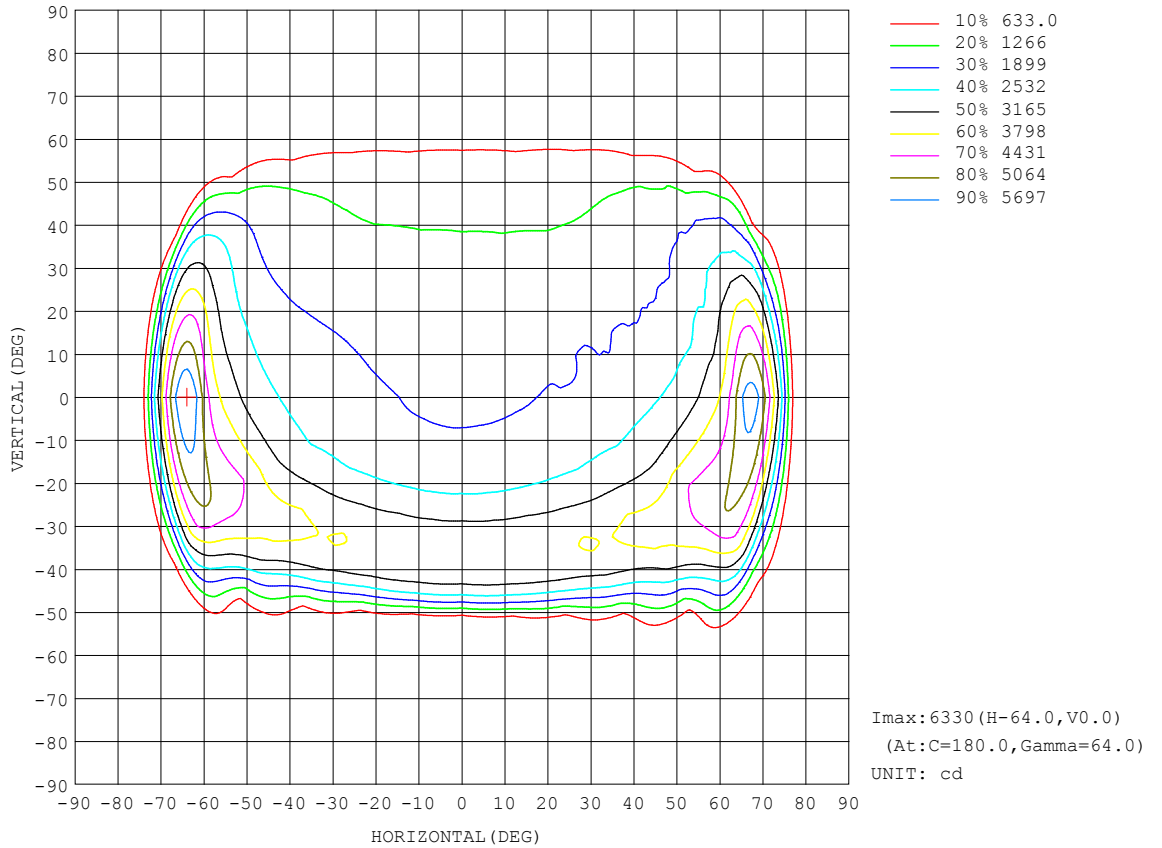

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2018-07-19

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.279
 Humidity:65.0%
 Test Distance:9.300m [K=1.0000]
 Remarks: 28合1 电源: 明伟HLG-60H-48B

Planar Illuminance Curve

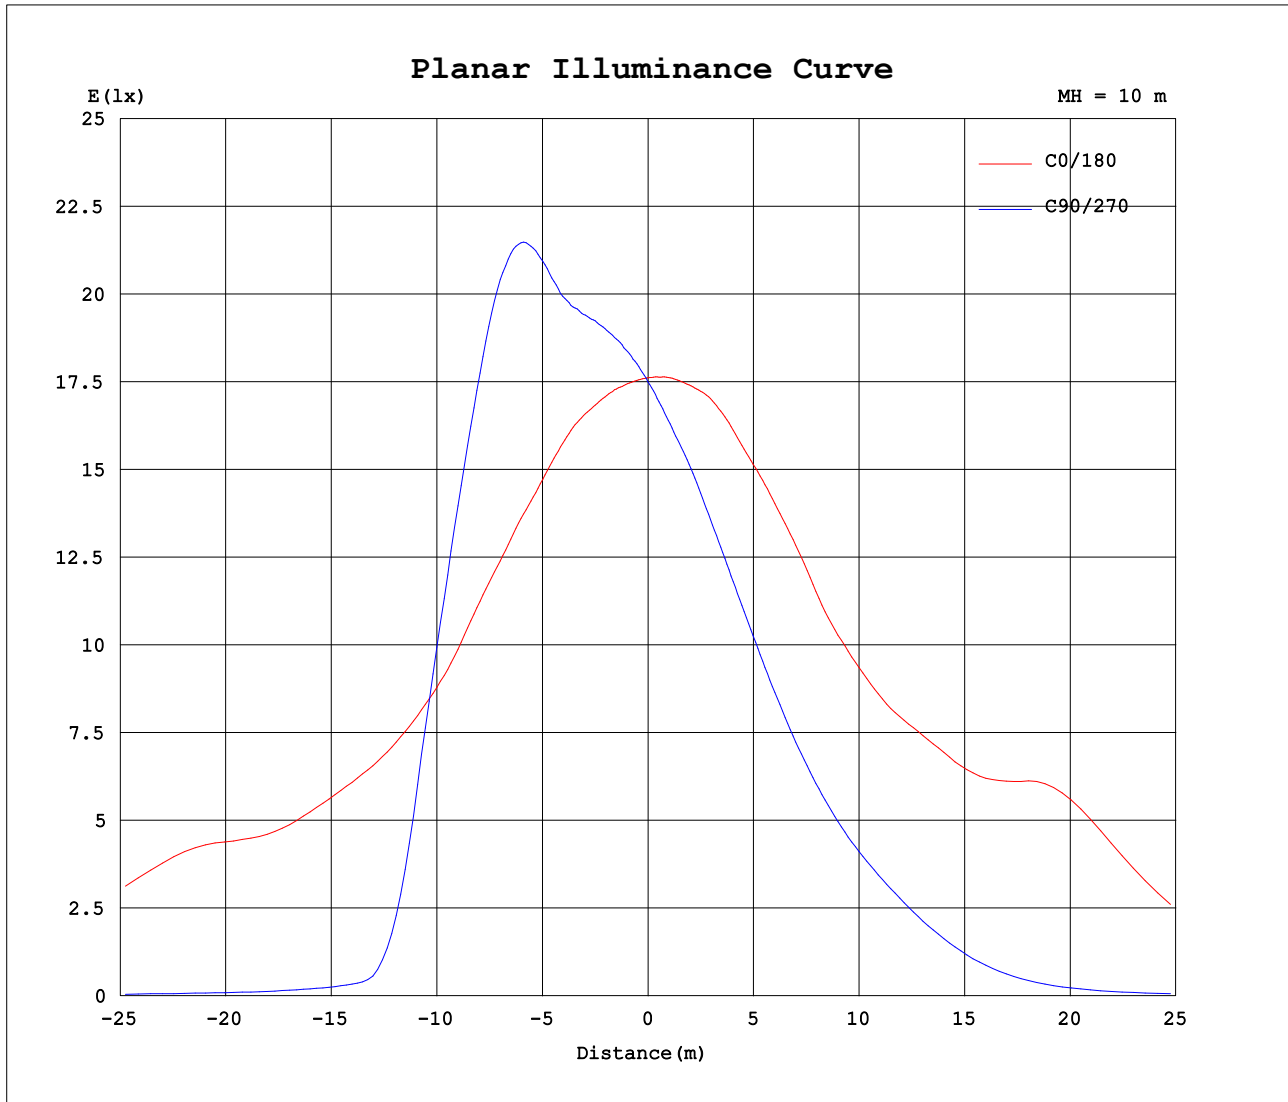

C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2018-07-19

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.279
Humidity: 65.0%
Test Distance: 9.300m [K=1.0000]
Remarks: 28合1 电源: 明伟HLG-60H-48B

LUMINOUS DISTRIBUTION INTENSITY DATA

| | | |
|---|----------------|-------------------|
| Test:U:220.7V I:0.2720A P:59.60W PF:0.9900 Lamp Flux:8441.99x1 lm | | |
| NAME: 路灯 | TYPE:室外 | WEIGHT:3 |
| SPEC.:LD6A-2 60W | DIM.: | SERIAL No.: |
| MFR.: | SUR.:0.07*0.25 | PROTECTION ANGLE: |

Table--1

UNIT: cd

| C (DEG) γ (DEG) | 0 | 15 | 30 | 45 | 60 | 75 | 90 | 105 | 120 | 135 | 150 | 165 | 180 | 195 | 210 | 225 | 240 | 255 | 270 |
|--------------------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|
| 0 | 1753 | 1753 | 1753 | 1753 | 1753 | 1753 | 1753 | 1753 | 1753 | 1753 | 1753 | 1753 | 1753 | 1753 | 1753 | 1753 | 1753 | 1753 | 1753 |
| 5 | 1759 | 1785 | 1808 | 1825 | 1840 | 1849 | 1854 | 1850 | 1846 | 1832 | 1817 | 1795 | 1776 | 1748 | 1724 | 1707 | 1687 | 1677 | 1672 |
| 10 | 1792 | 1844 | 1888 | 1922 | 1952 | 1969 | 1979 | 1975 | 1963 | 1935 | 1903 | 1860 | 1820 | 1769 | 1726 | 1689 | 1652 | 1625 | 1614 |
| 15 | 1849 | 1924 | 1992 | 2049 | 2095 | 2126 | 2142 | 2135 | 2112 | 2067 | 2013 | 1948 | 1896 | 1824 | 1755 | 1688 | 1622 | 1576 | 1559 |
| 20 | 1934 | 2030 | 2120 | 2206 | 2286 | 2343 | 2374 | 2356 | 2309 | 2230 | 2147 | 2060 | 1980 | 1878 | 1777 | 1672 | 1584 | 1524 | 1505 |
| 25 | 2018 | 2147 | 2275 | 2418 | 2582 | 2701 | 2769 | 2734 | 2629 | 2456 | 2302 | 2176 | 2069 | 1942 | 1802 | 1650 | 1536 | 1470 | 1451 |
| 30 | 2124 | 2282 | 2466 | 2755 | 3051 | 3224 | 3309 | 3269 | 3133 | 2839 | 2509 | 2317 | 2194 | 2018 | 1809 | 1606 | 1477 | 1408 | 1389 |
| 35 | 2246 | 2435 | 2768 | 3218 | 3553 | 3673 | 3719 | 3706 | 3633 | 3339 | 2868 | 2468 | 2326 | 2077 | 1795 | 1542 | 1404 | 1338 | 1319 |
| 40 | 2368 | 2621 | 3203 | 3676 | 3784 | 3684 | 3618 | 3665 | 3785 | 3768 | 3372 | 2713 | 2425 | 2139 | 1760 | 1463 | 1325 | 1262 | 1244 |
| 45 | 2476 | 2972 | 3713 | 3808 | 3441 | 3045 | 2816 | 2946 | 3323 | 3770 | 3866 | 3186 | 2635 | 2208 | 1724 | 1385 | 1255 | 1189 | 1166 |
| 50 | 2713 | 3589 | 4005 | 3358 | 2294 | 1324 | 865 | 1123 | 1955 | 3148 | 4011 | 3920 | 2987 | 2347 | 1701 | 1333 | 1205 | 1093 | 1055 |
| 55 | 3152 | 4345 | 3761 | 2152 | 521 | 185 | 169 | 172 | 332 | 1639 | 3570 | 4671 | 3591 | 2590 | 1737 | 1317 | 1042 | 840 | 802 |
| 60 | 3807 | 4911 | 2955 | 521 | 151 | 130 | 125 | 126 | 140 | 282 | 2386 | 5010 | 4869 | 3031 | 1784 | 1066 | 676 | 485 | 450 |
| 65 | 5576 | 4983 | 1218 | 149 | 110 | 109 | 111 | 108 | 105 | 130 | 575 | 4658 | 6212 | 3323 | 1323 | 478 | 280 | 216 | 204 |
| 70 | 5296 | 3458 | 178 | 103 | 94.0 | 93.6 | 89.9 | 89.6 | 91.9 | 95.6 | 134 | 1982 | 3616 | 1781 | 271 | 130 | 114 | 112 | 118 |
| 75 | 2044 | 522 | 101 | 82.0 | 73.8 | 80.6 | 81.1 | 81.3 | 71.1 | 76.2 | 91.8 | 187 | 299 | 115 | 86.5 | 79.0 | 81.8 | 92.9 | 96.1 |
| 80 | 86.1 | 96.7 | 71.4 | 60.6 | 71.1 | 82.3 | 72.4 | 81.2 | 70.5 | 58.8 | 66.3 | 67.5 | 51.3 | 50.2 | 45.9 | 57.8 | 65.0 | 75.4 | 77.2 |
| 85 | 36.8 | 48.1 | 53.0 | 57.6 | 70.1 | 84.0 | 77.2 | 85.6 | 71.7 | 59.2 | 57.3 | 39.7 | 18.3 | 22.9 | 33.4 | 44.9 | 54.3 | 63.9 | 70.2 |
| 90 | 11.1 | 24.7 | 38.1 | 47.2 | 49.2 | 50.4 | 20.4 | 50.6 | 44.7 | 38.8 | 29.2 | 17.0 | 5.23 | 7.90 | 16.7 | 23.5 | 35.3 | 48.2 | 48.8 |
| 95 | 4.53 | 4.69 | 6.28 | 6.93 | 8.79 | 11.1 | 5.33 | 8.27 | 1.77 | 1.84 | 3.77 | 4.91 | 3.97 | 3.82 | 2.42 | 1.04 | 0.69 | 1.06 | 1.59 |
| 100 | 3.34 | 2.56 | 1.44 | 0.88 | 0.71 | 0.92 | 1.13 | 1.00 | 0.90 | 1.31 | 2.65 | 4.51 | 4.29 | 4.04 | 2.77 | 1.33 | 0.80 | 1.07 | 1.77 |
| 105 | 4.36 | 3.54 | 2.09 | 1.26 | 0.92 | 1.07 | 1.29 | 1.14 | 1.15 | 1.68 | 3.06 | 5.40 | 5.46 | 5.08 | 3.64 | 2.08 | 1.28 | 1.30 | 1.90 |
| 110 | 5.44 | 4.56 | 2.82 | 1.77 | 1.30 | 1.37 | 1.53 | 1.40 | 1.51 | 2.12 | 3.53 | 5.60 | 6.14 | 5.65 | 4.45 | 2.91 | 2.00 | 1.82 | 2.31 |
| 115 | 5.78 | 5.05 | 3.45 | 2.34 | 1.78 | 1.74 | 1.86 | 1.73 | 1.98 | 2.66 | 4.00 | 5.60 | 6.31 | 6.15 | 5.11 | 3.76 | 2.87 | 2.60 | 3.05 |
| 120 | 5.91 | 5.26 | 3.87 | 2.89 | 2.31 | 2.27 | 2.34 | 2.22 | 2.49 | 3.11 | 4.35 | 5.57 | 6.45 | 7.19 | 5.87 | 4.53 | 3.73 | 3.51 | 4.01 |
| 125 | 6.12 | 5.60 | 4.27 | 3.27 | 2.84 | 2.78 | 2.86 | 2.70 | 3.01 | 3.37 | 4.60 | 5.48 | 6.59 | 7.31 | 6.51 | 5.29 | 4.50 | 4.35 | 5.06 |
| 130 | 6.25 | 5.87 | 4.58 | 3.67 | 3.18 | 3.18 | 3.27 | 3.07 | 3.30 | 3.83 | 4.63 | 5.32 | 6.67 | 7.21 | 6.92 | 5.85 | 5.25 | 5.07 | 5.90 |
| 135 | 6.59 | 5.91 | 4.71 | 3.98 | 3.51 | 3.48 | 3.59 | 3.38 | 3.54 | 4.05 | 4.71 | 5.53 | 6.71 | 7.51 | 8.37 | 6.67 | 6.01 | 5.99 | 6.84 |
| 140 | 6.86 | 5.82 | 4.81 | 4.22 | 3.79 | 3.82 | 4.15 | 3.73 | 3.80 | 4.28 | 4.74 | 5.55 | 6.42 | 7.81 | 10.4 | 7.20 | 6.42 | 6.84 | 7.65 |
| 145 | 6.53 | 5.54 | 4.85 | 4.42 | 4.05 | 4.12 | 4.53 | 4.07 | 4.05 | 4.50 | 4.85 | 5.37 | 5.97 | 7.34 | 9.73 | 8.78 | 7.08 | 7.81 | 8.30 |
| 150 | 6.05 | 5.28 | 4.86 | 4.55 | 4.25 | 4.44 | 4.71 | 4.40 | 4.26 | 4.55 | 5.31 | 5.17 | 5.62 | 6.70 | 8.42 | 9.24 | 7.82 | 7.87 | 8.60 |
| 155 | 5.74 | 5.22 | 4.86 | 4.65 | 4.43 | 4.69 | 4.89 | 4.63 | 4.44 | 4.59 | 5.11 | 5.14 | 5.37 | 6.20 | 7.28 | 8.35 | 8.64 | 9.14 | 9.44 |
| 160 | 5.54 | 5.23 | 4.90 | 4.74 | 4.60 | 4.84 | 4.98 | 4.75 | 4.61 | 4.70 | 4.88 | 5.06 | 5.31 | 5.85 | 6.53 | 7.35 | 7.94 | 8.12 | 8.75 |
| 165 | 5.46 | 5.27 | 5.03 | 4.89 | 4.79 | 4.97 | 5.07 | 4.86 | 4.75 | 4.87 | 4.95 | 5.06 | 5.32 | 5.60 | 6.05 | 6.59 | 7.06 | 7.59 | 7.92 |
| 170 | 5.44 | 5.32 | 5.11 | 5.01 | 4.89 | 5.05 | 5.13 | 5.00 | 4.90 | 5.07 | 5.14 | 5.14 | 5.37 | 5.48 | 5.73 | 6.01 | 6.26 | 6.55 | 6.84 |
| 175 | 5.44 | 5.32 | 5.17 | 5.11 | 5.04 | 5.20 | 5.29 | 5.21 | 5.11 | 5.23 | 5.63 | 5.22 | 5.42 | 5.45 | 5.49 | 5.62 | 5.69 | 5.88 | 6.01 |
| 180 | 5.46 | 5.40 | 5.37 | 5.37 | 5.36 | 5.53 | 5.58 | 5.61 | 5.47 | 5.54 | 5.89 | 5.55 | 5.46 | 5.42 | 5.40 | 5.45 | 5.47 | 5.64 | 5.76 |

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2018-07-19

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.279
 Humidity:65.0%
 Test Distance:9.300m [K=1.0000]
 Remarks: 28合1 电源: 明伟HLG-60H-48B

LUMINOUS DISTRIBUTION INTENSITY DATA

| | | |
|---|----------------|-------------------|
| Test:U:220.7V I:0.2720A P:59.60W PF:0.9900 Lamp Flux:8441.99x1 lm | | |
| NAME: 路灯 | TYPE:室外 | WEIGHT:3 |
| SPEC.:LD6A-2 60W | DIM.: | SERIAL No.: |
| MFR.: | SUR.:0.07*0.25 | PROTECTION ANGLE: |

Table--2

UNIT: cd

| C (DEG) \ γ (DEG) | 285 | 300 | 315 | 330 | 345 | | | | | | | | | | | | | | |
|-------------------|------|------|------|------|------|--|--|--|--|--|--|--|--|--|--|--|--|--|--|
| 0 | 1753 | 1753 | 1753 | 1753 | 1753 | | | | | | | | | | | | | | |
| 5 | 1672 | 1683 | 1698 | 1715 | 1737 | | | | | | | | | | | | | | |
| 10 | 1618 | 1640 | 1670 | 1708 | 1750 | | | | | | | | | | | | | | |
| 15 | 1567 | 1605 | 1660 | 1730 | 1798 | | | | | | | | | | | | | | |
| 20 | 1516 | 1566 | 1645 | 1751 | 1847 | | | | | | | | | | | | | | |
| 25 | 1464 | 1520 | 1625 | 1774 | 1729 | | | | | | | | | | | | | | |
| 30 | 1403 | 1467 | 1587 | 1783 | 1975 | | | | | | | | | | | | | | |
| 35 | 1334 | 1397 | 1530 | 1773 | 1902 | | | | | | | | | | | | | | |
| 40 | 1255 | 1315 | 1451 | 1741 | 2018 | | | | | | | | | | | | | | |
| 45 | 1179 | 1241 | 1373 | 1697 | 2020 | | | | | | | | | | | | | | |
| 50 | 1087 | 1193 | 1324 | 1666 | 2109 | | | | | | | | | | | | | | |
| 55 | 843 | 1047 | 1314 | 1682 | 2273 | | | | | | | | | | | | | | |
| 60 | 498 | 716 | 1123 | 1742 | 2570 | | | | | | | | | | | | | | |
| 65 | 234 | 328 | 591 | 1343 | 2774 | | | | | | | | | | | | | | |
| 70 | 117 | 126 | 175 | 444 | 2101 | | | | | | | | | | | | | | |
| 75 | 93.9 | 86.6 | 86.1 | 94.4 | 176 | | | | | | | | | | | | | | |
| 80 | 85.6 | 69.4 | 54.7 | 54.4 | 62.2 | | | | | | | | | | | | | | |
| 85 | 64.7 | 55.3 | 37.1 | 37.8 | 32.6 | | | | | | | | | | | | | | |
| 90 | 47.0 | 36.2 | 37.8 | 26.0 | 14.1 | | | | | | | | | | | | | | |
| 95 | 1.63 | 0.85 | 1.74 | 3.19 | 4.83 | | | | | | | | | | | | | | |
| 100 | 1.63 | 0.89 | 0.96 | 2.23 | 4.21 | | | | | | | | | | | | | | |
| 105 | 1.79 | 1.21 | 1.63 | 3.30 | 5.33 | | | | | | | | | | | | | | |
| 110 | 2.25 | 1.87 | 2.55 | 4.41 | 6.33 | | | | | | | | | | | | | | |
| 115 | 3.00 | 2.74 | 3.62 | 5.32 | 7.33 | | | | | | | | | | | | | | |
| 120 | 3.93 | 3.79 | 4.61 | 6.21 | 8.97 | | | | | | | | | | | | | | |
| 125 | 4.89 | 4.74 | 5.51 | 7.13 | 9.55 | | | | | | | | | | | | | | |
| 130 | 5.73 | 5.77 | 6.43 | 8.09 | 9.65 | | | | | | | | | | | | | | |
| 135 | 6.91 | 6.65 | 7.49 | 8.58 | 9.41 | | | | | | | | | | | | | | |
| 140 | 7.79 | 7.67 | 8.60 | 11.8 | 9.37 | | | | | | | | | | | | | | |
| 145 | 8.64 | 8.54 | 8.73 | 10.8 | 8.78 | | | | | | | | | | | | | | |
| 150 | 8.98 | 8.28 | 10.5 | 9.36 | 8.14 | | | | | | | | | | | | | | |
| 155 | 9.88 | 9.16 | 8.65 | 8.03 | 7.64 | | | | | | | | | | | | | | |
| 160 | 8.61 | 7.95 | 7.44 | 7.23 | 7.25 | | | | | | | | | | | | | | |
| 165 | 7.76 | 7.18 | 6.67 | 6.69 | 6.69 | | | | | | | | | | | | | | |
| 170 | 6.94 | 6.42 | 6.14 | 6.34 | 5.80 | | | | | | | | | | | | | | |
| 175 | 6.18 | 5.85 | 5.75 | 6.02 | 5.60 | | | | | | | | | | | | | | |
| 180 | 5.78 | 5.61 | 5.61 | 5.95 | 5.57 | | | | | | | | | | | | | | |

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2018-07-19

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.279
 Humidity:65.0%
 Test Distance:9.300m [K=1.0000]
 Remarks: 28合1 电源: 明伟HLG-60H-48B