# HBLA UFO SERIES LED HIGH BAY LIGHT

Power:240W












#### Feature

- Radiator surface spray processing anticorrosion performance, cooling effect is more, an organic whole die-casting lamp, fastening structure.
- Imported Original Philips LEDs, with higher lumen efficacy, energy saving and better illumination effect.
- Meanwell driver, full voltage, can be applied invarious environment.
- Bean gngle: 60°,90°,120°.
- 5 years warrany, life-time maintainence at cost price.
- Protection Grade: IP65 waterproof.




#### Product details

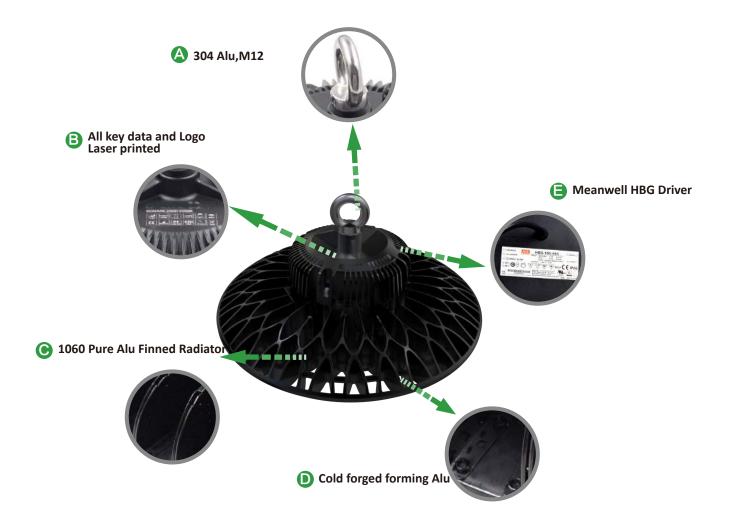



## Explosive view

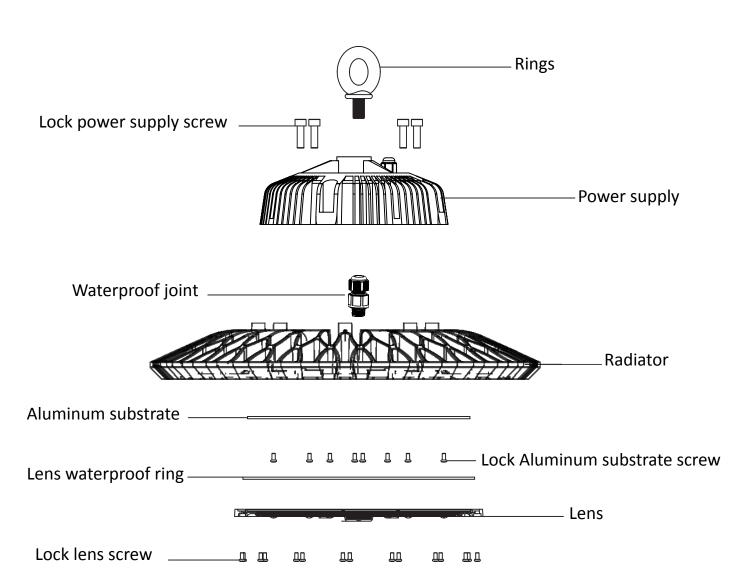









Applied to indoor high industrial factory building, gymnasium, workshop, equipment manufacturing factory,warehouse, workshop, ceiling lighting, etc., etc.



The workshop



The high building



The stadium



Warehouse






















## Specifications

Model	GH-HBLA-240W				
Imput watt	240W				
Luminous Efficacy	>140LM/W				
Imput voltage	AC85-265V				
Frequency ( Hz )	50-60HZ				
Power factor	>0.98				
ССТ	3000K±200K	4000K±200K	6500K±200K		
LED chip&Qty	SMD3030 (315PCS)				
Driver	Meanwell Driver				
CRI	>80				
Product size	Ø400*180mm				
N.W.	6.0kg				
Environment temperature	-20°C-+45°C				
Certificates	CE、 ROHS				
Lifespan	50000Н				
Warranty	5 years				




## Product size

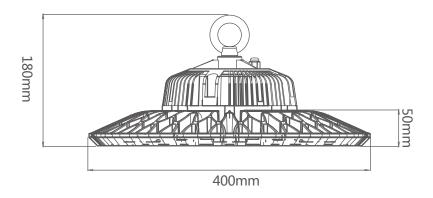

# Package size

Product model	Power	Size	Net Weight	Carton size	Quantity
GH-HBLA-240W	240W	Ø400*180mm	6.0kg	475*470*195mm	1pcs


The following is a neutral cowhide carton packing, such as the need to print LOGO, can be customized.

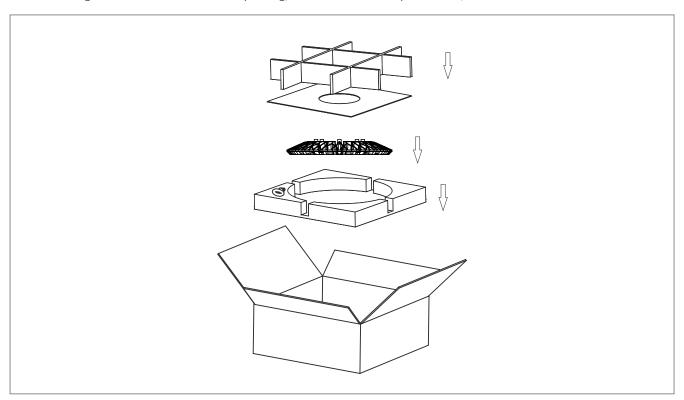



#### Installation

- 1.Safety is first.
- 2. This series of industrial and mining lamp light lifting, hook type two kinds of installation, wider application range.
- 3. The installation shall be completed by experienced electrician.
- 4. Any further questions, feel free to get us for more solutions.



#### Cautions



- Lightning Protection: Meanwell driver can resist 4KV surge, if the using environment out of this range, please add higher grade surge terminal.
- Degree of Protection: IP65, can be applied outdoor, but immersed in water. The tempered glass shall not be knocked by any pointed thing.
- Don't install or use it in a humid environment or place which has water drops.
- Don't take apart the product or replace mechanical and electronic components.
- Don't stare at the strong light for a long time as it may cause injury to eyes.
- No specific requirements, the wires shall be 3\*0.75 without plug, if yes, keep it informed by the sales.
- This series of lights are not compatible with ballast, when replacing the tradtional lamps, please remove the ballast or contact us for more solutions.



# Aging test







## Test report

IES test

